



Product Description: 26 inch TFT-LCD PANEL			
AUO Model Name: T260XW02 VF			
Customer Part No/Project Name:			
Customer Signature	Date	AUO	Date
		Approved By: PL Chen	
		Prepared By: CJ Tan 12/1 2006	

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



Document Version: 1.0

Date:2006/12/1

Product Functional Specification

26" Color TFT-LCD Module

Model Name: T260XW02 VF

(QDI Model: QD26HL0102)

() Preliminary Specification

(*) Final Specification

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed




This specification sheet is for model name change, since AUO merged QDI from 2006/10/1

This Specification Sheet keep the original QDI Model name and Spec.

New Model name and old model name comparison table as following:

	AUO	QDI
Model Name	T260XW02 VF	QD26HL0102
Change Item	1. Carton Printing format 2. Product Serial label format	

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed

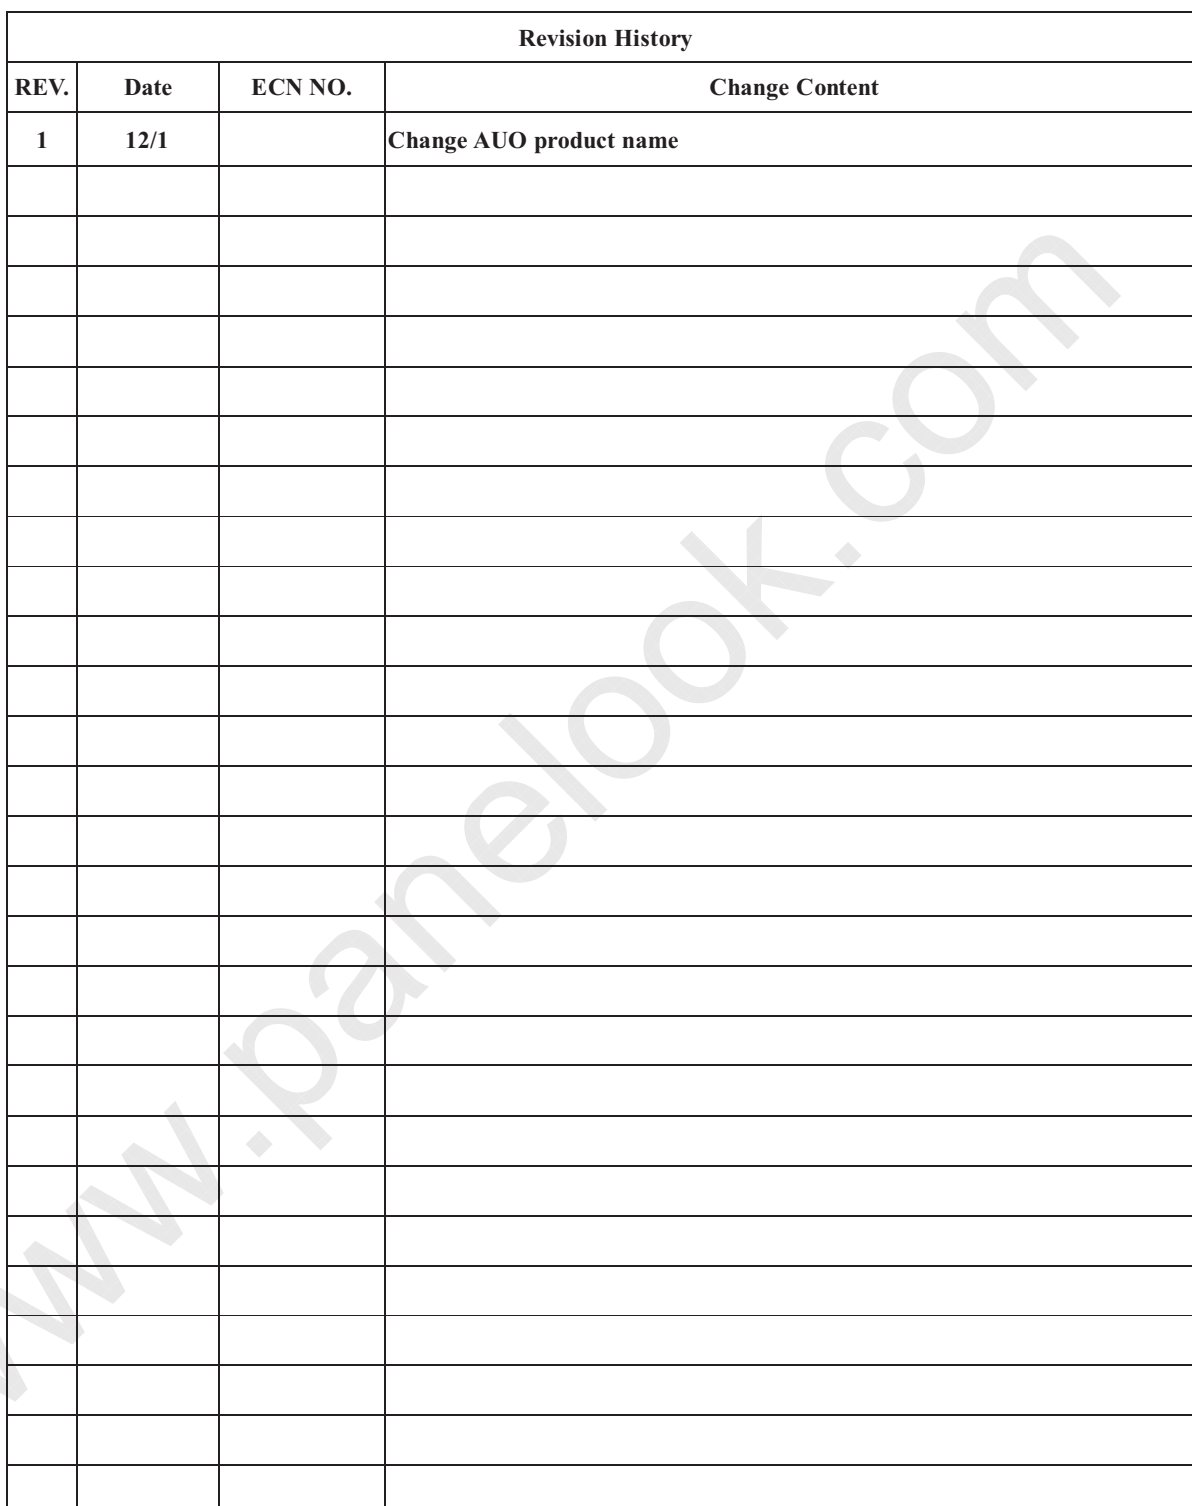

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com



Content List

	Page
1. Application	5
2. Overview	5
3. General Specifications	5
4. Input Terminals	6
5. Absolute Maximum Ratings	5
6. Electrical Characteristics	11
7. Timing Characteristics	15
8. Input Signals, Basic Display Colors and Gray Scale of Each Color	17
9. Optical Characteristics	18
10. Display Quality	21
11. Handling Precautions	21
12. Reliability Test Items	21
13. Others	22
14. Drawing	23



1. Application

This specification applies to a color TFT-LCD module, QD26HL01

2. Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel; driver ICs, control circuit and power supply circuit and a backlight unit. Graphics and texts can be displayed on a 1366×3×768 dots panel with 16.7 million colors by using the LVDS (Low Voltage Differential Signaling) interface, 8-bit driving method and supplying +12V DC supply voltage for TFT-LCD panel driving.

The TFT-LCD panel used for this module has very high aperture ratio. A low-reflection and higher-color-saturation type color filter is also used for this panel. Therefore, high-brightness and high-contrast image, which is suitable for the LCD TV, HDTV and multimedia use, can be obtained by using this module.

[Features]

- 1) High aperture panel; high-brightness
- 2) Brilliant and high contrast image.
- 3) High speed response
- 4) WXGA resolution. 16:9
- 5) LVDS interface.
- 6) QSV technology
- 7) Wide viewing angle.

3. General Specifications

Parameter	Specifications	Unit
Display size	66.05 (26") Diagonal	cm
Active area	575.769 (H)×323.712 (V)	mm
Pixel format	1366 (H)×768 (V)	Pixel
	(1 pixel = R+G+B dots)	
Pixel pitch	0.4215 (H) × 0.4215 (V)	mm
Pixel configuration	R,G,B vertical stripe	
Display mode	Normally Black	
Unit outline dimensions	626 x 373	mm
Thickness	Typ. 40.9	mm

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



Weight	TBD	g
Surface treatment	Anti-glare(12%) and hard-coating 3H	
Lamp Quantity	8 U shape	pcs

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



4. Input Terminals

4-1. TFT-LCD panel driving

CN1 (LVDS signals and +12V DC power supply)

Connector on Panel : FI-X30SSL-HF(Manufactured by JAE) or

Equivalent

Mating connector : FI-30C2L (Manufactured by JAE) or Equivalent

Pin No	Symbol	Description	Default
1	VCC	+12V, DC, Regulated	
2	VCC	+12V, DC, Regulated	
3	VCC	+12V, DC, Regulated	
4	VCC	+12V, DC, Regulated	
5	GND	Ground and Signal Return	
6	GND	Ground and Signal Return	
7	GND	Ground and Signal Return	
8	GND	Ground and Signal Return	
9	LVDS Option	High/Open for Normal (NS), Low for JEIDA	Default NS type
10	Reserved	N.C.	Test Mode?
11	GND	Ground and Signal Return for LVDS	
12	RXIN0-	LVDS Channel 0 negative	
13	RXIN0+	LVDS Channel 0 positive	
14	GND	Ground and Signal Return for LVDS	
15	RXIN1-	LVDS Channel 1 negative	
16	RXIN1+	LVDS Channel 1 positive	
17	GND	Ground and Signal Return for LVDS	
18	RXIN2-	LVDS Channel 2 negative	
19	RXIN2+	LVDS Channel 2 positive	
20	GND	Ground and Signal Return for LVDS	
21	RXCLKIN-	LVDS Clock negative	

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



22	RXCLKIN+	LVDS Clock Positive	
23	GND	Ground and Signal Return for LVDS	
24	RXIN3-	LVDS Channel 3 negative	
25	RXIN3+	LVDS Channel 3 positive	
26	GND	Ground and Signal Return for LVDS	
27	Reserved	N.C.	Test Mode?
28	Reserved	N.C.	Test Mode?
29	GND	Ground and Signal Return	
30	GND	Ground and Signal Return	


【Note 1】 All GND(ground) pins should be connected together.

【Note 2】 All V_{DD} (power supply) pins should be connected together.

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



4-2 Interface block diagram

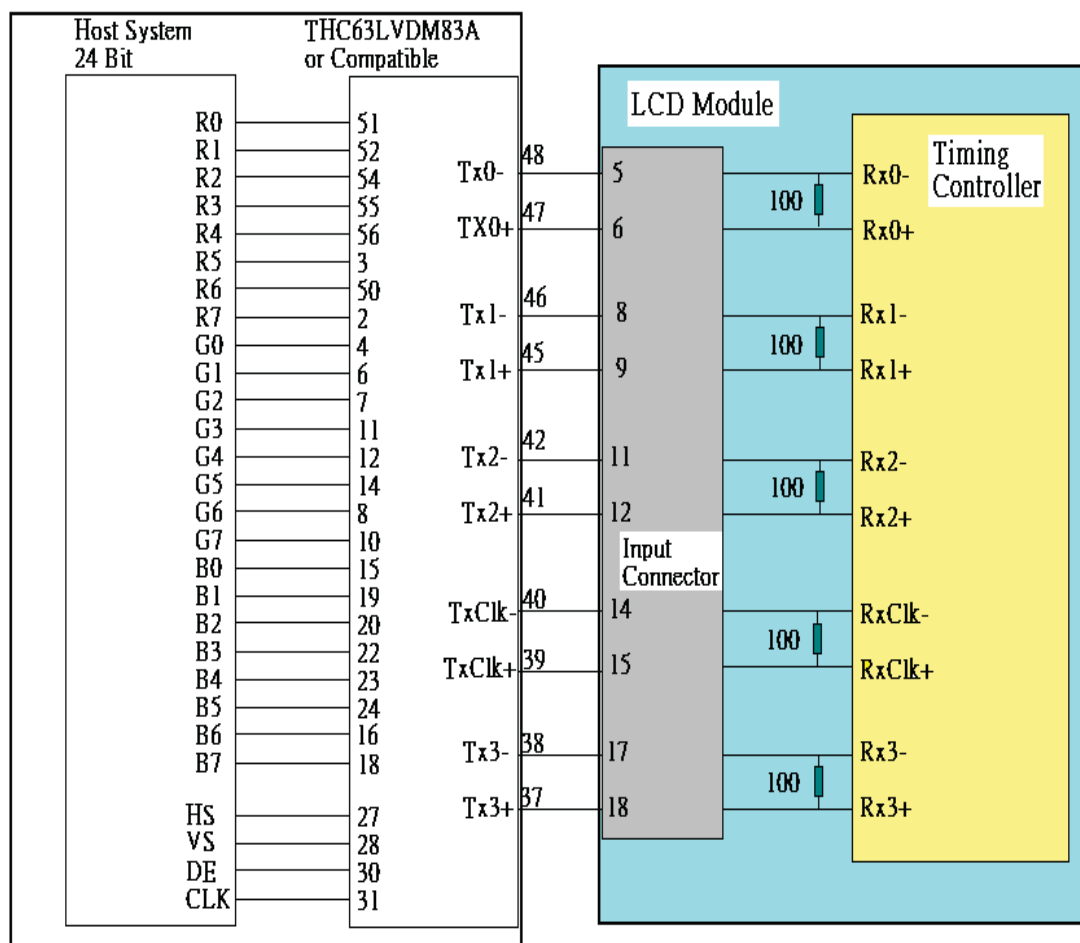

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



4-3. Backlight driving

4-3-1. Inverter Connector

Connector on Inverter : S14B-PH-SM3(Manufactured by JST) or
Equivalent

Mating connector : PHR-14 (Manufactured by JST) or Equivalent
() : need further discussion on both sides

Pin No	Symbol	Description	Default
1	VIN	Operating Voltage Supply, +24V DC regulated	24V
2	VIN	Operating Voltage Supply, +24V DC regulated	24V
3	VIN	Operating Voltage Supply, +24V DC regulated	24V
4	VIN	Operating Voltage Supply, +24V DC regulated	24V
5	VIN	Operating Voltage Supply, +24V DC regulated	24V
6	BLGND	Ground and Current Return	GND
7	BLGND	Ground and Current Return	GND
8	BLGND	Ground and Current Return	GND
9	BLGND	Ground and Current Return	GND
10	BLGND	Ground and Current Return	GND
11	ADIM	Analog Dimming : Open/High(3.3V) for Max. Lum.	Max
12	ON/OFF	BL On-Off : High(3.3V) or (Open) for BL On as default	On
13	PDIM	PWM Dimming Control : Open/High(3.3V) for Max. Lum	Max
14	PESEL	Selection of lumimance control method, Vcx duty:high/, PWM duty:low/open	

4-3-2. Lamp connector

TBD

5. Absolute Maximum Ratings

LCD module

Parameter	Symbol	Condition	Ratings	Unit	Remark
+12V supply voltage	V _{DD}	Ta=25℃	-0.3 ~ +14.0	V	
Storage temperature	T _{stg}	—	-20 ~ +60	℃	【Note1】

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



Operating temperature (Ambient)	Topa	—	0 ~ +50	℃	
---------------------------------	------	---	---------	---	--

【Note1】 Humidity : 90%RH Max. at $T_a \leq 40^\circ\text{C}$.

Maximum wet-bulb temperature at 39°C or less at $T_a > 40^\circ\text{C}$.

No condensation.

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



6. Electrical Characteristics

6-1.TFT-LCD panel driving


Ta=25°C

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
V _{DD}	Supply voltage	V _{DD}	11.4	+12.0	12.6	V	【Note2】
	Current dissipation	I _{DD}	—	340	700	m A	【Note3】
Permissive input ripple voltage		V _{RP}	—	—	120	mV p-p	V _{DD} =+12V
Differential input threshold voltage	High	V _{TH}	—	—	100	mV	V _{CM} =+1.2V 【Note1】
	Low	V _{TL}	-100	—	—	mV	
Rush current		I _{RUSH}			3.0	A	Rise time 470uS

【Note1】 V_{CM} : Common mode voltage of LVDS driver.

【Note2】

Power On-off sequence

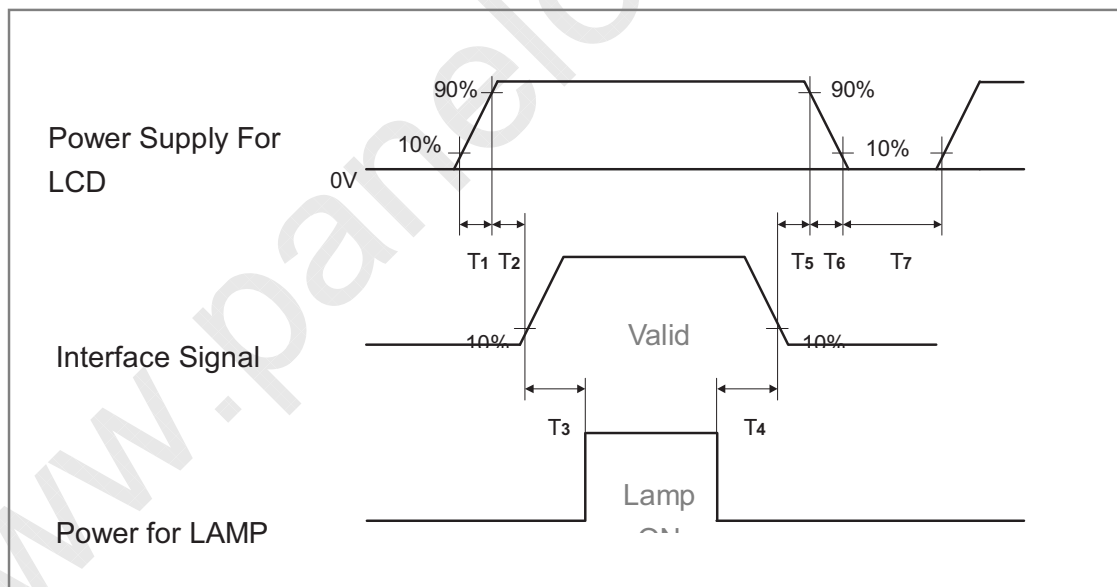

1ms < T1, T6 ≤ 10 ms 0.5ms < T2, T5 ≤ 50 ms 200ms < T3, T4 T7 > 1 s

【Note3】 Maximum current condition; Change to 1x1 dot checker board pattern. V_{DD}=+12V

©Copyright AU Optonics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



R	G	B	R	G	B
R	G	B	R	G	B
R	G	B	R	G	B
R	G	B	R	G	B

 : 0 GS : 255 GS

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed




6-2. Backlight driving

The backlight system is a direct-lighting type with 8 U shape CCFT (Cold Cathode Fluorescent Tube).

The characteristics of the lamp are shown in the following table.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Lamp current range	I_L	5.5	6	6.5	mA rms	【Note1】
Lamp voltage	V_L		1000		Vrms	
Lamp power consumption	P_L		6		W	【Note2】 $I_L = \text{mA}$
Lamp frequency	F_L	42	45	48	kHz	【Note3】
Established starting voltage	V_s		1100	1500	Vrms	$T_a = 25^\circ\text{C}$
			1200	1500	Vrms	$T_a = 0^\circ\text{C}$ 【Note4】
Lamp life time	L_L	50000			hour	【Note5】

【Note1】 Lamp current is measured with current meter for high frequency as shown below.

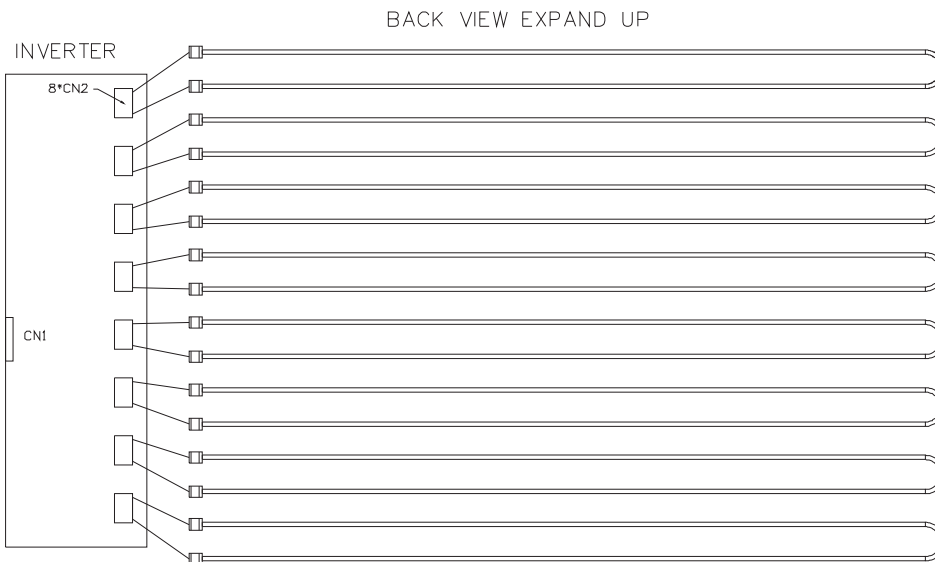

【Note2】 Calculated Value for reference ($I_L \times V_L$)

【Note3】 Lamp frequency may produce interference with horizontal synchronous frequency, and this may cause beat on the display.

Therefore lamp frequency shall be detached as much as possible from

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



the horizontal synchronous frequency and from the harmonics of horizontal synchronous to avoid interference.

【Note4】 The voltage above this value should be applied to the lamp for more than 1 second to start-up. Otherwise the lamp may not be turned on.

【Note5】 Lamp life time is defined as the time when either ① or ② occurs in the continuous operation under the condition of $T_a = 25^{\circ}\text{C}$ and $I_L = 6\text{mA}_{\text{rms}}$.

① Brightness becomes 50 % of the original value under standard condition.

② Kick-off voltage at $T_a = 0^{\circ}\text{C}$ exceeds maximum value.



【Note6】 The performance of the backlight, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter (miss-lighting, flicker, etc.) never occur. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.

【Note7】 The lamp wire length is TBD mm(from AL back cover surface to connector, not including connector length)

6-3 Backlight inverter

6-3-1. Inverter Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Input Voltage	V _{DDB}	22.8	24	25.2	Vdc	
Power Supply Input Current	I _{DDB}	3300	3600	3900	mA	
Power Consumption	P _B		86.4		W	

6.4 Luminance Controls

Method	Adjustment and Luminance Ratio		PESEL	PDIM	Remark
Voltage control	Adjustment – Continuous adjustment of Luminance by adjusting the voltage of BRTI within the rated range.		High/Open for max.	N/A	
PWM control	BRTI voltage	Luminance ratio	LOW	PWM singal	See PWM
	0V	20%(minimum)			
	3.3V	100%			
		(maximum)			


©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



	signal when PWSEL is low and PWM signal is inputted into BRTP termial.				timing
	Duty Ratio	Luminance Ratio			
	0.2	20%(minimum)			
	1.0	100% (maximum)			

6-5. PWM timing

6-5-1. Timing diagram

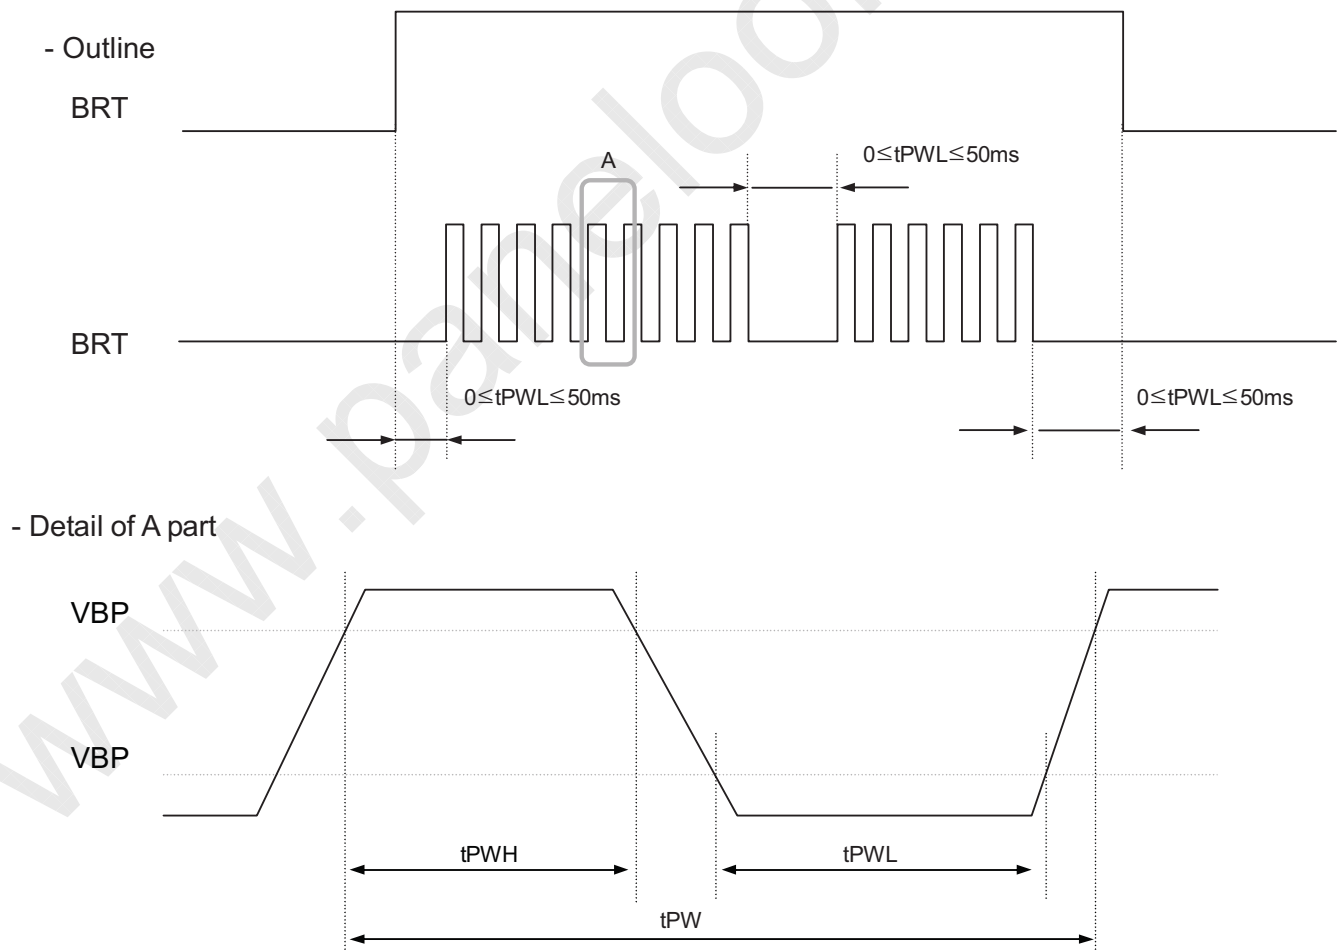

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed

**6-5-2. Each parameter**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Luminance control	FL	230	255	280	Hz	1, 2
Duty Ratio	DL	0.2	-	1.0	-	1, 3
Non signal Period	tPWL	0	-	50	Ms	4

Notes : 1. Definition of parameters is as follows

$$FL = \frac{1}{tPW}, \quad DL = \frac{tPWH}{tPW}$$

2. See the following formula for luminance control frequency.

$$\text{Luminance control frequency} = tvv \times (n+0.25)[\text{or}(n+0.72)]$$

$$n=1,2,3,\dots$$

tvv : See "7.1 Signal timing specification"

The interference noise of luminance control frequency and input signal frequency for
LCD



7. Timing characteristics of LCD module input signals

7-1. Timing characteristics


(This is specified at digital outputs of LVDS driver.)

ITIME	Symbol		Min	Typ	Max	Unit	Notes
DCLK	Frequency	F_{CLK}	-	80	82	MHz	
	Period	t_{CLK}	12.2	12.5	-	ns	
Hsync	Period	t_{HA}	1512	1648	1780	t_{CLK}	
	Width-Active	t_{HC}	8	16	-		
	Frequency	f_H	44	48.54	52	kHz	
Vsync	Frequency	f_V	47	60	63	Hz	
	Period	t_{VA}	774	810	-	t_{HA}	
	Width-Active	t_{VC}	2	6	-		
Data Enable	Horizontal back porch	t_{HD}	8	80	-	t_{CLK}	
	Horizontal front porch	t_{HF}	16	186	-	t_{CLK}	
	Horizontal active	t_{HE}	1366	1366	1366	t_{CLK}	
	Horizontal blanking	t_{HB}	146	282		t_{CLK}	
	Vertical back porch	t_{VD}	2	20	-	t_{HA}	
	Vertical front porch	t_{VF}	2	16	-	t_{HA}	
	Vertical active	t_{VE}	768	768	768	t_{HA}	
	Vertical blanking	t_{VB}	6	42		t_{HA}	

Notes : 1.The performance of electro-optical characteristics may be influenced by variance of the vertical refresh rate.


2. Hsync period will be a double number of character (8).

7-2 Signal Timing Waveform(The time “B” is t_{HB} on horizontal timing and t_{VB} on vertical timing)

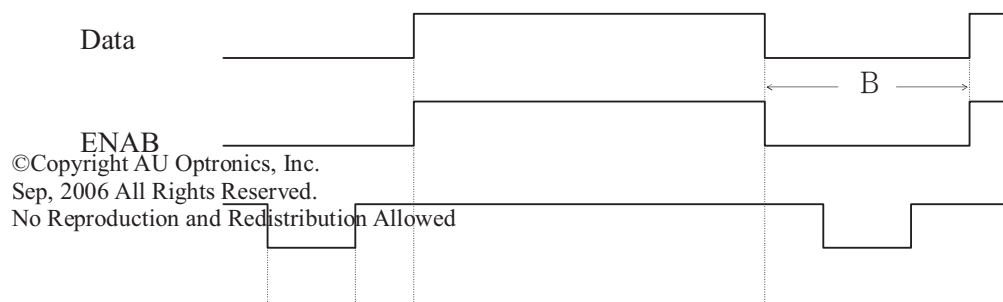



Sync



©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



8. Input Signals, Basic Display Colors and Gray Scale of Each Color

	Colors & Gray scale	Data Signal																							
		R0 R1 R2 R3 R4 R5 R6 R7	G0 G1 G2 G3 G4 G5 G6 G7	B0 B1 B2 B3 B4 B5 B6 B7																					
Basic Color	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	Blue	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1																					
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0																					
	Cyan	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1																					
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	Magenta	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1																					
	Yellow	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0																					
	White	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1																					
Gray Scale of Red	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	↑	1 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	Darker	0 1 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	↑		↑	↑																					
	↓		↓	↓																					
	Bright	1 0 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	↓	0 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
Gray Scale of Green	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	↑	0 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	Darker	0 0 0 0 0 0 0 0	0 1 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	↑		↑	↑																					
	↓		↓	↓																					
	Bright	0 0 0 0 0 0 0 0	1 0 1 1 1 1 1 1	0 0 0 0 0 0 0 0																					
	↓	0 0 0 0 0 0 0 0	0 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0																					
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0																					
Gray Scale of Blue	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0																					
	↑	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0																					
	Darker	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 1 0 0 0 0 0 0																					
	↑		↑	↑																					
	↓		↓	↓																					

©Copyright AU Optronics, Inc.

Sep, 2006 All Rights Reserved.

No Reproduction and Redistribution Allowed



	Bright	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1
	↓	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1

0 : Low level voltage, 1 : High level voltage

www.panelook.com

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed




9. Optical Characteristics

Ta=25°C, V_{DD}=+12V

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angle range	L/R	θ_{21}, θ_{22}	CR>10		85		Deg.	【Note1,4】
	U	θ_{11}			85		Deg.	
	D	θ_{12}			85		Deg.	
Contrast ratio		C R n	$\theta = 0^\circ$		600	—		【Note2,4】
Response time		τ		—	25	—	ms	【Note3,4】
Rise time	τ_r				TBD	—	ms	
Fall time	τ_d				TBD	—	ms	
Chromaticity of White (CIE 1931)		W _x		0.245	0.275	0.305		【Note4】 Color temperature 10000K NTSC 72%
		W _y		0.268	0.298	0.328		
Chromaticity of Red (CIE 1931)		R _x			TBD			
		R _y			TBD			
Chromaticity of Green (CIE 1931)		G _x			TBD			
		G _y			TBD			
Chromaticity of Blue (CIE 1931)		B _x			TBD			
		B _y			TBD			
Luminance of white 【Note4】		$\bar{Y}_L$		400	500		Cd/m ²	
White Uniformity		δ_w		—	—	1.3		【Note5】
Black Uniformity		δ_B				1.3		【Note5】

※ The measurement shall be executed 30 minutes after lighting at rating. (typical condition : I_L = 6mA_{rms})

The optical characteristics shall be measured in a dark room or equivalent state with the method shown in Fig.1 below.

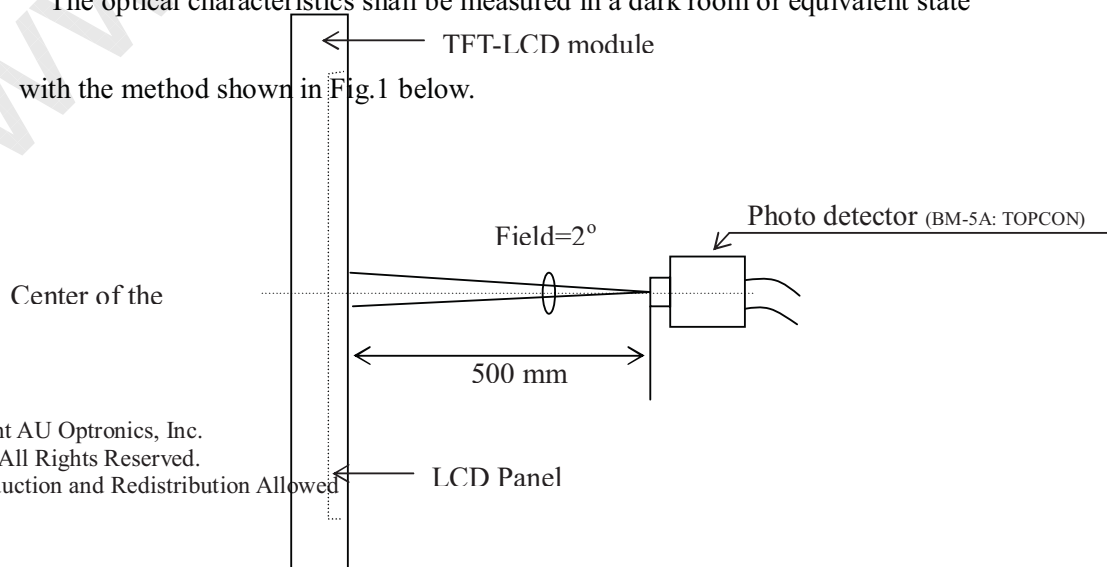

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed




www.panelook.com

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



【Note1】 Definitions of viewing angle range:

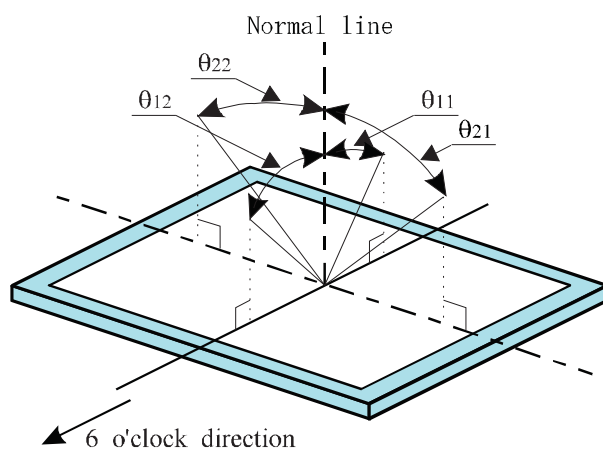

【Note2】 Definition of contrast ratio:


The contrast ratio is defined as the following.

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance (brightness) with all pixels}}{\text{Luminance (brightness) with all pixels}}$$

【Note3】 Definition of response time:

The response time is defined as the following figure and shall be measured by

switching the input signal for "black" and "white" .

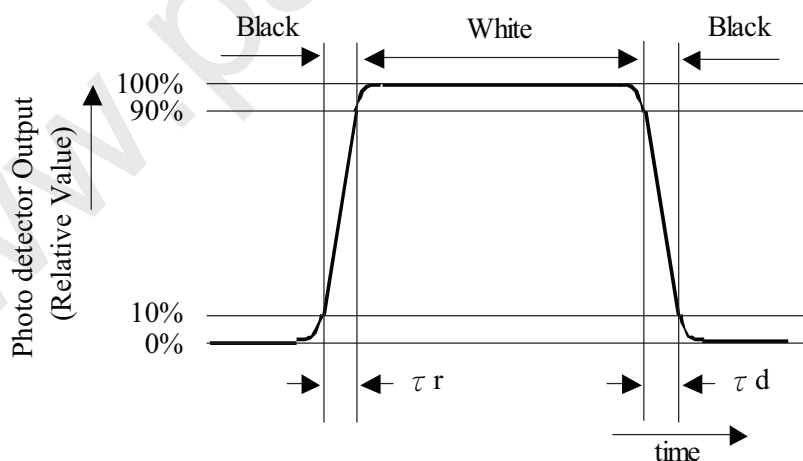


【Note4】 This shall be measured at center of the screen.

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



【Note5】 Definition of white uniformity:

White and black uniformity is defined as the following with nine measurements

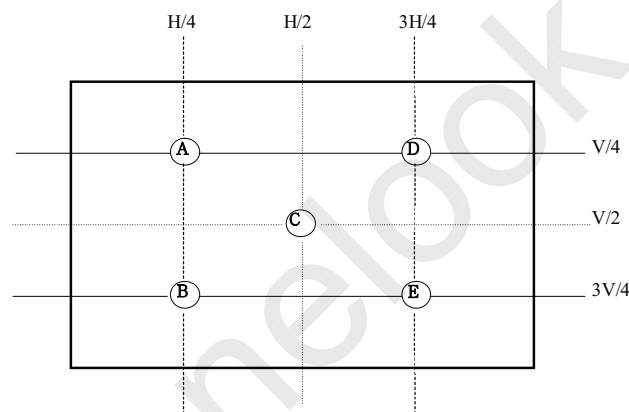

Maximum Luminance (of 5 points measurement)

δ_{wR} = Minnum Luminance (of 5 points measurement)



10. Display Quality

The display quality of the color TFT-LCD module shall be in compliance with the Incoming Inspection Standard.

11 · Handling Precautions

- a) Be sure to turn off the power supply when inserting or disconnecting the cable.
- b) Be sure to design the cabinet so that the module can be installed without any extra stress such as warp or twist.
- c) Since the front polarizer is easily damaged, pay attention not to scratch it.
- d) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- e) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- f) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface. Handle with care.
- g) Since CMOS LSI is used in this module, take care of static electricity and injure the human earth when handling.
- h) Observe all other precautionary requirements in handling components.
- i) This module has its circuitry PCBs on the rear side and should be handled carefully in order not to be stressed.
- j) Laminated film is attached to the module surface to prevent it from being scratched . Peel the film off slowly just before the use with strict attention to electrostatic charges. Ionized air shall be blown over during the action. Blow off the 'dust' on the polarizer by using an ionized nitrogen gun, etc..

12. Reliability test items

No.	Test item	Conditions
1	High temperature storage test	Ta = 60℃ 240h
2	Low temperature storage test	Ta = -20℃ 240h
3	High temperature & high humidity operation test	Ta = 50℃ ; 80 %RH 240h
4	High temperature operation test	Ta = 60℃ 240h
5	Low temperature operation test	Ta = 0℃ 240h

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed




6	Vibration test (non-operating)	Frequency: 10~500Hz, 1.0G , 20 min/each axis
7	Shock test (non- operating)	Gravity : 100G Pulse width : 2ms, half sine wave Direction : $\pm X, \pm Y, \pm Z$ Once for each direction.

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed



13 • Others

1) LCD Module Label:

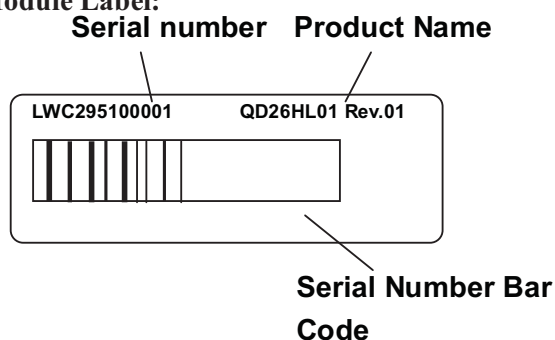

LWC295100001 Digital code 4, 5 is Date code.

Digital 4 (Year) 1: 2001, 2: 2002, 3:2003,....

Digital 5 (Month) 1: Jan, 2: Feb,... , A:Oct, B:Nov., C: Dec.

2) Adjusting volume has been set optimally before shipment, so do not change any adjusted value.

If adjusted value is changed, the specification may not be satisfied.


3) Disassembling the module can cause permanent damage and should be strictly avoided.

4) Please be careful since image retention may occur when a fixed pattern is displayed for a long time.


5) If any problem occurs in relation to the description of this specification, it shall be resolved through discussion with spirit of cooperation.



14. Drawing

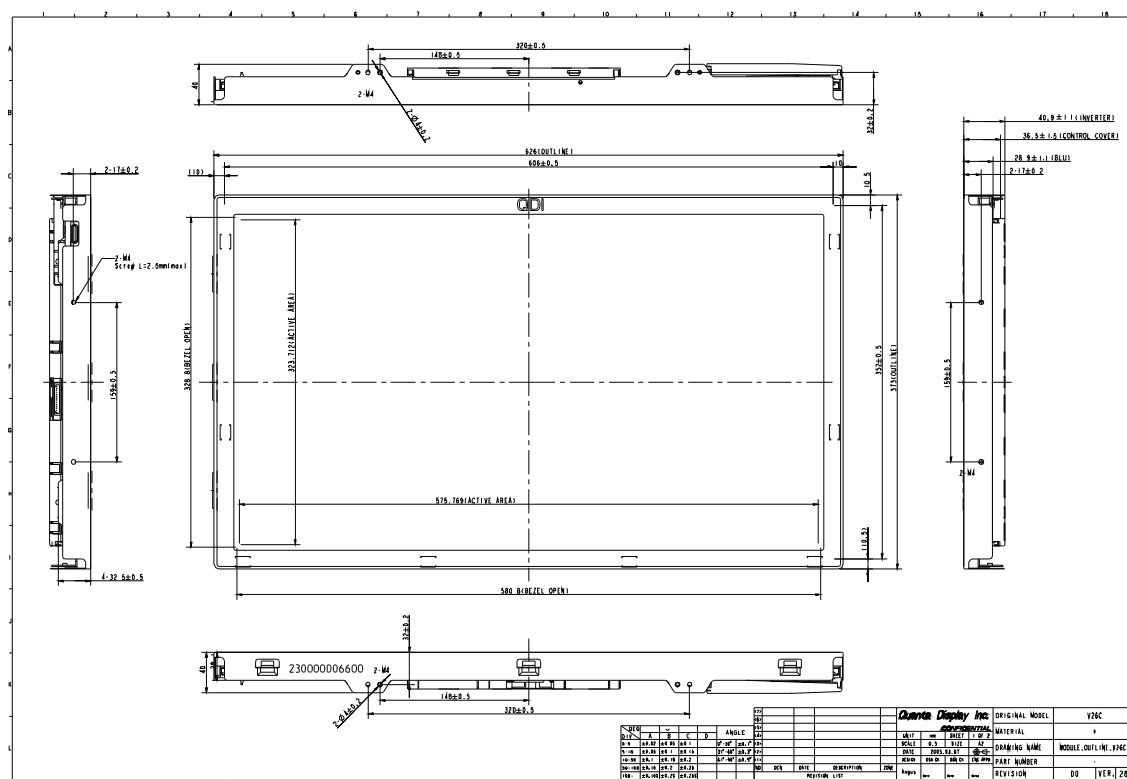

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed

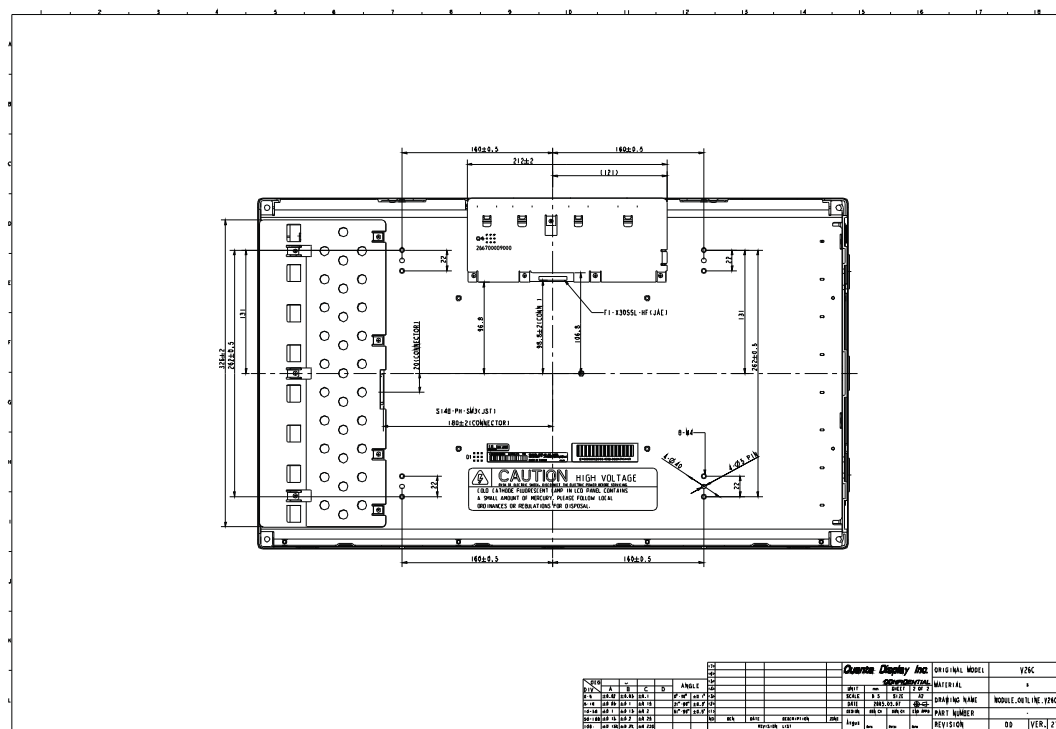

©Copyright AU Optronics, Inc.
Sep, 2006 All Rights Reserved.
No Reproduction and Redistribution Allowed